


Products Description

Earthing Copper C Clamp is used for lightning protection of building, conductor of the fastening and connection of the net work, Use the matched fittings will make the lightning system easy to install and extend the using life.

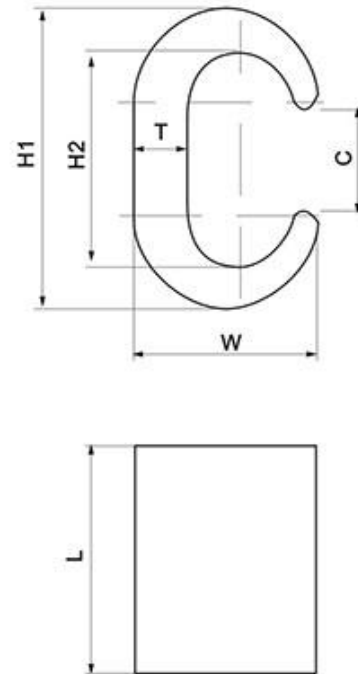

Type	Suitable Section of Conductors(mm ²)	Dimensions(mm)					
		H1	H2	W	L	T	C
CCT-10	7.5-11	9.5	6.3	6.2	12	1.6	4
CCT-16	11.5-16	11.8	7.8	7.3	13	2	5
CCT-20	14-20	12.8	8.6	9.7	13	2.9	5.4
CCT-26	21-26	14.7	10.2	10.9	16	3.2	6.5
CCT-44	27-44	19	12.4	14.4	20	4	8.5
CCT-60	45-60	21	15.4	15.1	22	4	9.7
CCT-76	61-76	24.4	17.3	17.6	22	5	10.8
CCT-98	77-98	27.8	20.8	18.1	25	5	12.8
CCT-122	99-122	29.8	22.1	21.2	26	5.5	13.5
CCT-154	123-154	34	25.7	24.2	28	6	17
CCT-190	155-190	37	28.5	25.4	35	6	17.4
CCT-240	191-240	40	30.2	28.5	40	7	19
CCT-288	241-288	44.5	34.7	31.1	45	7	22.3
CCT-365	289-365	47.5	37.7	34	50	7	24.8
CCT-450	366-450	57	42.5	41	60	10	28
CCT-560	451-560	62	46	45	65	11	31
CCT-700	561-700	68	52	49.5	70	12	34