

Product Information:

MPS carriage bolts are roll threaded with square shoulder and square nut.



Material

Steel hot dip galvanized

3/8" Diameter - Minimum Tensile Strength 4,250 lbs

Catalog number	Bolt Length (in)	Thread Length (in)	Weight /100 (lbs)
LR8634	4	3	16
LR8634-1/2	4 1/2	3	16
LR8635	5	3	18
LR8636	6	3	22
LR8637	7	4	24
LR8638	8	4	26
LR8640	10	4	34


1/2" Diameter - Minimum Tensile Strength 8,500 lbs

Catalog number	Bolt Length (in)	Thread Length (in)	Weight /100 (lbs)
LR8645	5	3	35
LR8646	6	3	41
LR8647	7	4	44
LR8648	8	4	51

Clevis bolts

Product Information:

Clevis bolts are used to provide dead end connections to eyes or links. Clevis end includes 1/2" diameter machine bolt with nut and a stainless steel self locking cotter pin to provide a secure vibration proof assembly. design.

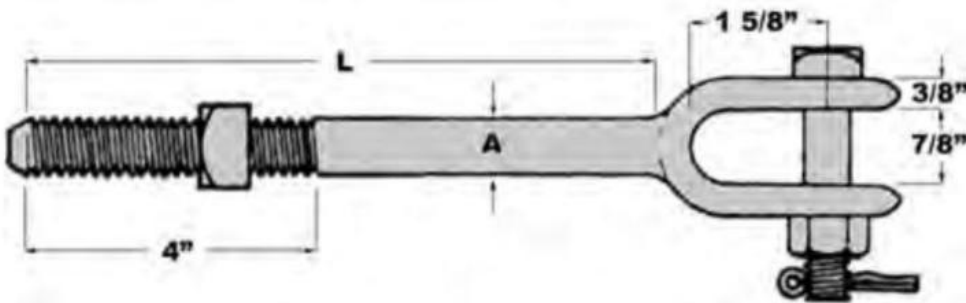

Material

Steel hot dip galvanized

Minimum Tensile Strength 13,500 lbs

Catalog number	Size (in)	Thread Length (in)	Weight /100 (lbs)
LR7810	5/8x 10	4	172
LR7812	5/8 x 12	4	192
LR7814	5/8x 14	4	208