


#### **Product Description**

Copper Claded Non-Magnetic Stainless Steel Ground Rods are made from 99. 9 % pure electrolytic copper tube and non magnetic steel

This product claded copper thickness more than 1.5mm,so the conductive good performance,low resistance, and can be comparable to pure copper ground rod.

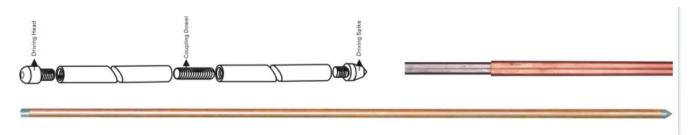

Part No.	Rod Dia	Length	Copper tube thickness
CCR-1212	12.5mm	1200mm	≥1.5mm
CCR-1312	13mm	1200mm	
CCR-1412	14mm	1200mm	
CCR-1415	14mm	1500mm	
CCR-1615	16mm	1500mm	
CCR-1715	17.2mm	1500mm	

## **Driving Head**

Driving Heads are made from hardened and tempered steel. It is used protect the internal thread and the top of the earth electrode when being driven into the ground.

Part No	Length(mm)	Thread Dia(mm)	Material
DH16	38	10	Hardened steel
DH20	41	10	

### **Coupling Dowel**

Coupling dowels for stainless steel earth rods are made from stainless steel or brass, It used to join either the solid copper and stainless steelrods.

Part No	Length(mm)	Thread Dia (mm)	Material
CD16		10	
CD20		10	Stainless Steel
	0		

## **Driving Spike**

Driving spikes are made from case hardened steel it is used to enable the earth Electrode to be driven into the ground more easily and stops the earth electrode from Being damaged.



# **Copper Claded Non-Magnetic Stainless Steel Ground Rods**

Part No	Length(mm)	Thread Dia (mm)	Material
DS16	0	10	Stainless Steel
DS20		12	