


Cross Arm

Product Information:


Electrical cross arm is also named power pole cross arms, utility pole cross arms, telephone pole cross arms, light pole cross arms or crossarms for short. In different application setups, there are different configurations for the electrical cross arm. For instance, power pole cross arms are connected with the pin insulator by insulator pin, and the insulator connects with the wire to realize the power delivery.

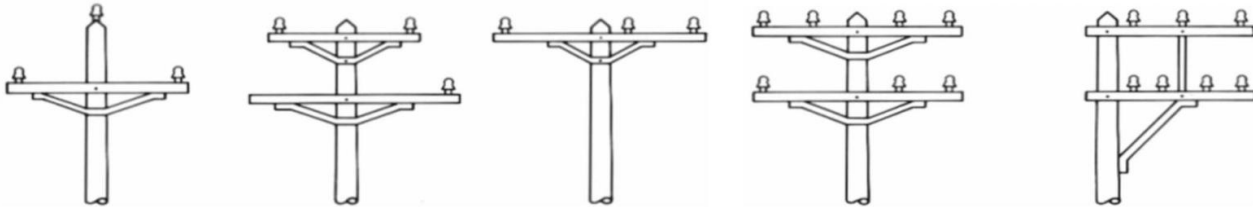

Type	Width(mm)	High(mm)	Thickness(mm)	Length(mm)
Angle	100	63	8	3000
	90	90	8	3000
	125	80	8	3000
	100	63	8	2500
	100	63	6	2500
	160	100	12	6000
	160	100	12	9000
	125	75	8	2240
	100	50	5	600
	50	50	5	1200
	75	75	8	1200
	75	50	8	750
U Channel	160	100	8.5	3000
	160	65	8.5	3000
	160	100	8.5	550
	100	50	5	2240

Armements Pour Lignes Rigides

VOUTE RIGIDE VR1 ET VR2
VOUTE RIGIDE GAINEE VR1G ET VR2G

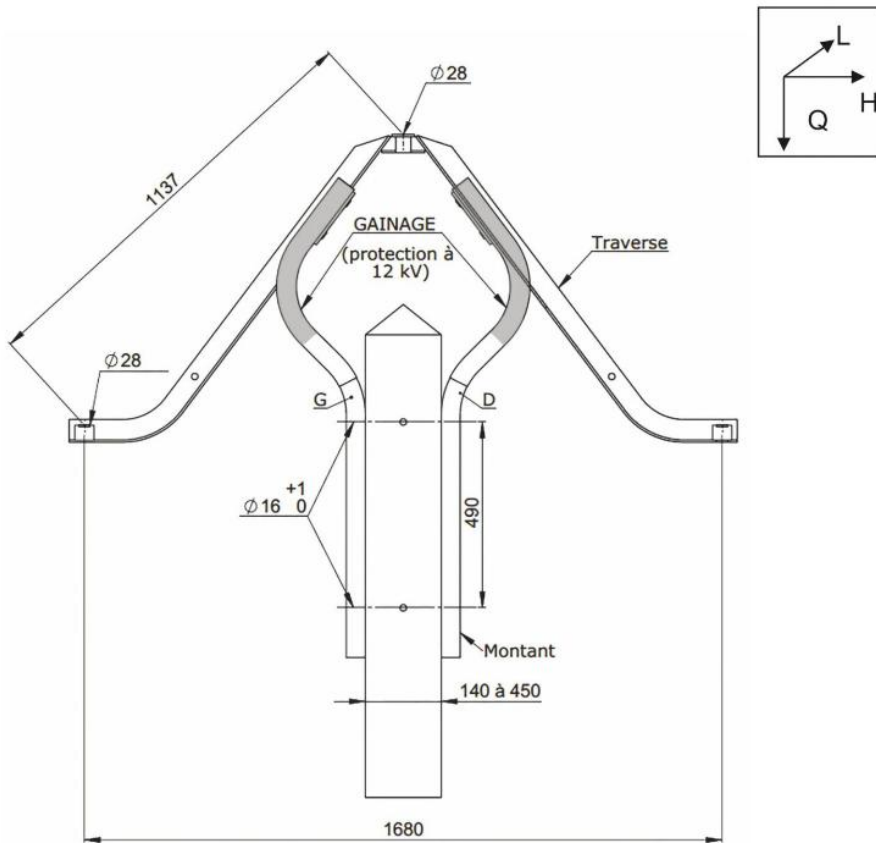

UTILISATION

- Réseau HTA sur isolateurs rigides.
- La forme de ces armements a été spécialement étudiée pour la protection des oiseaux.

Reference	Codet	Profile en L		Effort nominal * (daN)			Poids (Kg)
		Montant	Traverse	Q	H	L	
VR1	68 53 335	50	60	160	160	40	23
VR1G	68 53 336	50	60	160	160	40	23
VR2	68 53 337	70	80	440	380	100	43
VR2G	68 53 338	70	80	440	380	100	43

*Les efforts sont donnés en nominal. Effort en limite élastique: 1,6.