


Product Information:


Material: aluminum-covered steel, for use on ACSR, AAC, AAAC, and plastic Jacketed conductors.

Top Tie

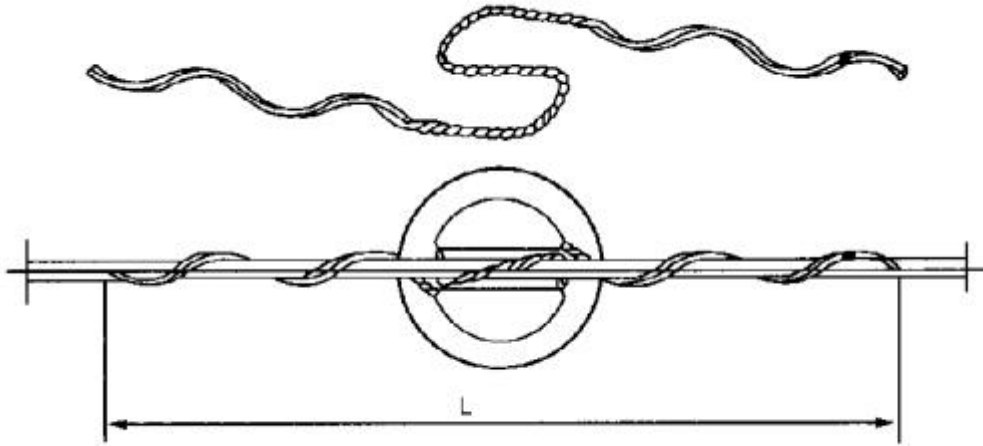

Type	Conductor Dia. (mm)	L(mm)Length	Color code	Mode Dia Color code	Weight (Kg)
DT-480550C	4.80-5.50	610	Blue	Mark: Black for Type C	0.08
DT-551620C	5.51-6.20	640	Brown		0.09
DT-621700C	6.21-7.00	660	Orange		0.09
DT-701800C	7.01-8.00	660	Purple		0.09
DT-801910C	8.01-9.10	710	Red		0.09
DT-9111030C	9.11-10.30	760	Yellow		0.09
DT-10311170C	10.31-11.70	640	Blue		0.15
DT-1171320C	11.71-13.20	640	Orange		0.16
DT-13211490C	13.21-14.90	710	Red		0.17
DT-14911690C	14.91-16.90	760	Purple		0.17
DT-16911920C	16.91-19.20	790	Brown		0.18
DT-19212170C	19.21-21.70	810	Red		0.18
DT-21712460C	21.71-24.60	860	Blue		0.19
DT-24612780C	24.61-27.80	940	Green		0.19
DT-27813150C	27.81-31.50	1020	Yellow		0.2

Side tie

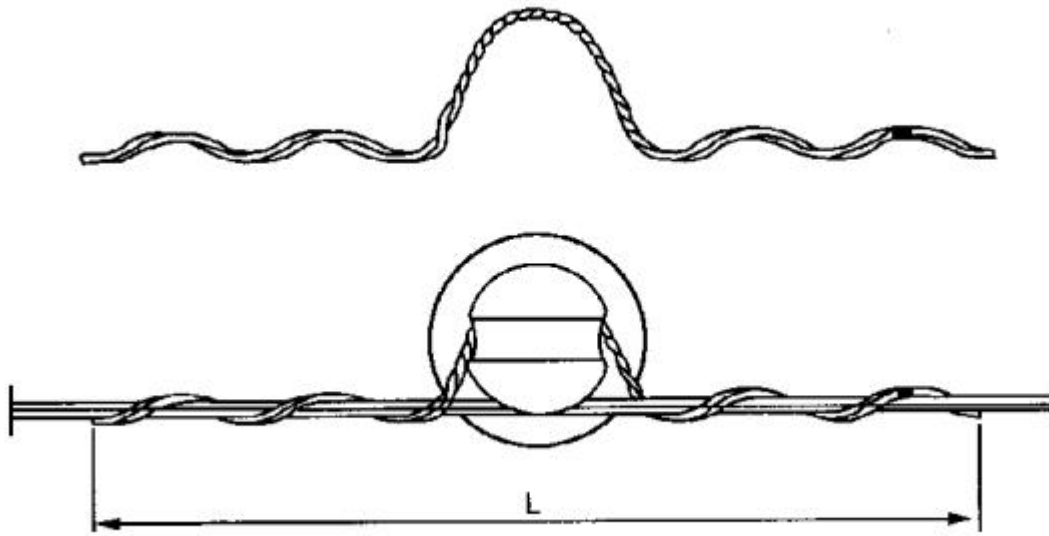

Type	Conductor	L (mm)	Color code	Mode Dia Color	Weight (Kg)
	Dia.	Length		code	
DT-480550C	4.80-5.50	410	Blue	Mark: Black for Type C	0.06
DT-551620C	5.51-6.20	430	Brown		0.07
DT-621700C	6.21-7.00	480	Orange		0.08
DT-701800C	7.01-8.00	540	Purple		0.09
DT-801910C	8.01-9.10	610	Red		0.13
DT-9111030C	9.11-10.30	660	Yellow		0.14
DT-10311170C	10.31-11.70	660	Blue		0.18
DT-1171320C	11.71-13.20	740	Orange		0.19
DT-13211490C	13.21-14.90	790	Red		0.2
DT-14911690C	14.91-16.90	580	Purple		0.21
DT-16911920C	16.91-19.20	640	Brown		0.27
DT-19212170C	19.21-21.70	660	Red		0.28
DT-21712460C	21.71-24.60	710	Blue		0.29
DT-24612780C	24.61-27.80	740	Green		0.3
DT-27813150C	27.81-31.50	840	Yellow		0.34