
Products Description

These earth bonding points are installed to provide earthing continuity and a multiple bonding point. When cast into concrete they connect the Re-bar to the earthing or lightening protection system. The bonding points are available with one, two and four hole connections. The bonding points are available with variety of tail lengths to suit different applications.

Material :Gunmetal, Brass.

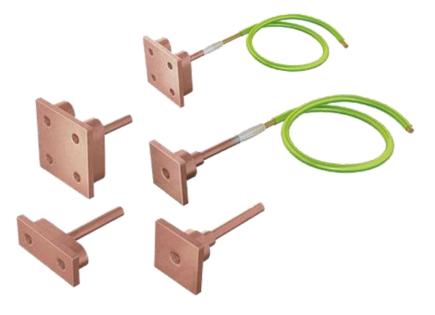

Specification

Material:	Brass/ Copper
Normal Diameter:	12.7mm/16mm/20mm
Cable Size:	6-35mm2/16-70mm2/70-185mm2
Certificate:	CE, ISO9001,RoSH,TUV
Stock available:	Yes.Can shipping faster
Samples:	Availiable
Standard:	IEC standard
Application:	Earthing And Lightning Protection System
Available service:	OEM, ODM
Service life:	≥30years