

**Product Information:**

A shoulder nut eye bolt can be used when applying angular loads, while keeping in mind the rated capacity is drastically reduced when loading at any angle. When a shoulder pattern-lifting eye is properly seated in the receiving hole, the shoulder bears against the seat and reduces bending stress on the shank.

Forged shoulder eye bolt



OvaLeye bolt



Thimble eye bolt(elbow)




Thimble eye bolt(straight)



| Type             | Dia | Length(mm) |
|------------------|-----|------------|
| Eye Bolt         | M16 | 250        |
| Thimble eye bolt | M20 | 350        |
| M16              | M16 | 2400       |
| M16              | M20 | 2400       |

Support custom size

**OvaLEye Bolts**

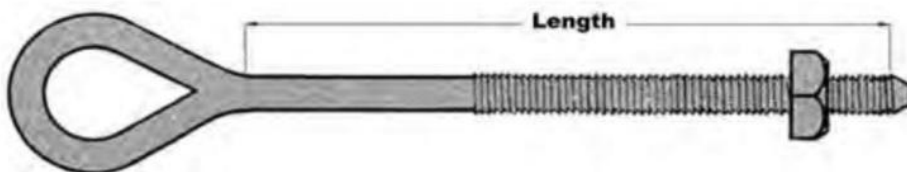

### Application

Eye bolts are commonly used as an attachment point to secure thimbles, clevises, links and deadend insulators.

### Features

- Forged, one-piece design
- Supplied assembled with square nut
- EyeLD- 1 1/2x2"

### Material


Steelhot dip galvanized

5/8"Diameter - Minimum Tensile Strength 13,550 lbs

| Catalog number | Bolt Length (in) | Thread Length (in) | Weight /100 (lbs) |
|----------------|------------------|--------------------|-------------------|
| LR9406         | 6                | 4                  | 112               |
| LR9408         | 8                | 4                  | 128               |
| LR9409         | 9                | 4                  | 136               |
| LR9410         | 10               | 6                  | 146               |
| LR9412         | 12               | 6                  | 156               |
| LR9414         | 14               | 6                  | 168               |
| LR9416         | 16               | 6                  | 188               |
| LR9418         | 18               | 6                  | 212               |
| LR9420         | 20               | 6                  | 220               |

3/4"Diameter - Minimum Tensile Strength 20,050 lbs

| Catalog number | Bolt Length (in) | Thread Length (in) | Weight /100 (lbs) |
|----------------|------------------|--------------------|-------------------|
| LR9508         | 8                | 4                  | 180               |
| LR9510         | 10               | 6                  | 200               |
| LR9512         | 12               | 6                  | 220               |
| LR9514         | 14               | 6                  | 240               |
| LR9516         | 16               | 6                  | 256               |
| LR9518         | 18               | 6                  | 280               |

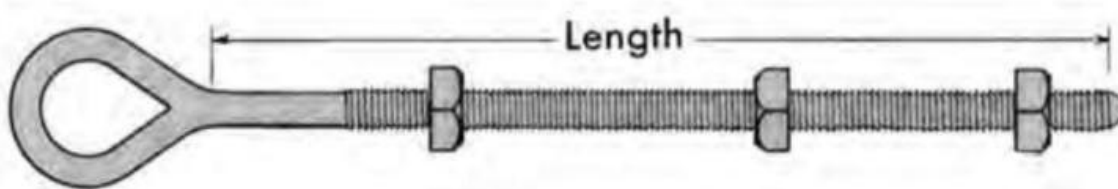

### Features

- Double Arming Eyebolts (D .A. Eyebolts) are forged in a one piece design and are commonly used as a combination double arming bolt as well as an eyebolt.
- Double arming eyebolts are fully threaded the entire bolt length except for 2 inches under the eye. They are supplied assembled with three square nuts.

•Eye LD.1- 1/2" width x 2" length

**Material**

Steel hot dip galvanized

5/8" Diameter - Minimum Tensile Strength 13,550 lbs

| Catalog number | Bolt Length (in) | Thread Length (in) | Weight /100 (lbs) |
|----------------|------------------|--------------------|-------------------|
| LR9614         | 14               | 12                 | 204               |
| LR9616         | 16               | 14                 | 220               |
| LR9618         | 18               | 16                 | 232               |
| LR9620         | 20               | 18                 | 244               |
| LR9622         | 22               | 20                 | 260               |
| LR9624         | 24               | 22                 | 280               |
| LR9626         | 26               | 24                 | 300               |

3/4" Diameter - Minimum Tensile Strength 20,050 lbs

| Catalog number | Bolt Length (in) | Thread Length (in) | Weight /100 (lbs) |
|----------------|------------------|--------------------|-------------------|
| LR9636         | 16               | 14                 | 300               |
| LR9638         | 18               | 16                 | 320               |
| LR9640         | 20               | 18                 | 340               |
| LR9642         | 22               | 20                 | 360               |
| LR9644         | 24               | 22                 | 380               |
| LR9646         | 26               | 24                 | 400               |