



**Overview**

OPGW Premored/Helical Tension Clamp is mainly used for installation of cable with less than 160 kN RTS onto tension tower/pole, corner tower/pole, and terminal tower/pole. A complete set of OPGW Premored/Helical Tension Set includes Aluminum Alloy or Aluminum-Clad Steel Dead-end, Structural Reinforcing Rods, Supporting fittings and Grounding wire Clamps etc.

**OPGW Single Preformed Tension Clamp**

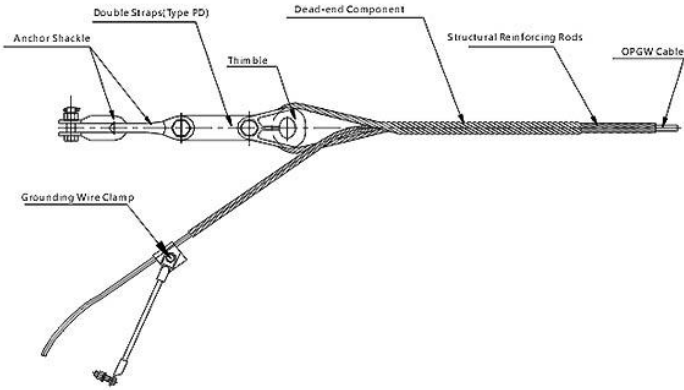

**OPGW Extra-Strength Double Preformed Tension Clamp**

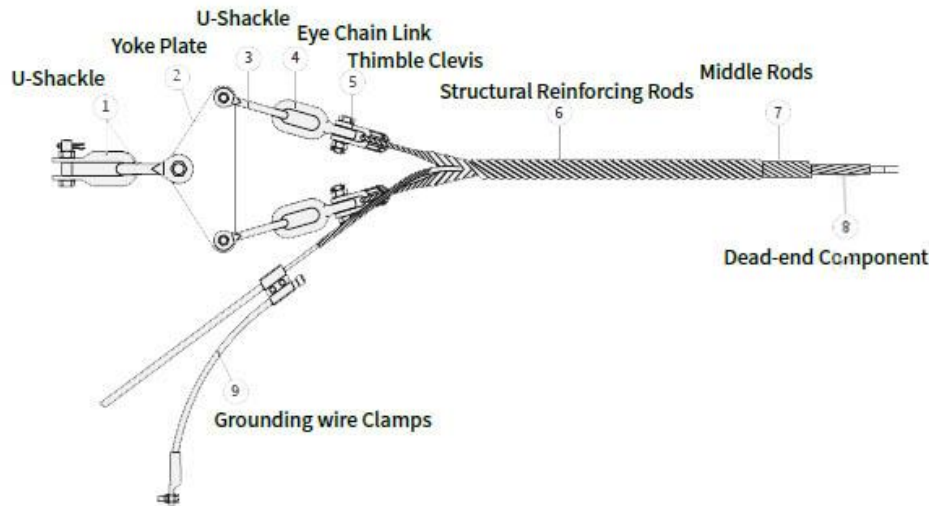

**Parameter**

**Specification of OPGW Single Preformed Tension Clamp**

Type	Available Dia.of Cable		RTS of cable (kN)
	Min. ( mm)	Max.( mm)	
ONL O60/0880	7.6	8.8	60
ONL O60/1010	8.9	10.1	60
ONL O60/1140	10.2	11.4	60
ONL O60/1270	11.5	12.7	60
ONL O60/1400	12.8	14	60
ONL O60/1530	14.1	15.3	60
ONL O80/0880	7.6	8.8	80
ONL O80/1010	8.9	10.1	80
ONL O80/1140	10.2	11.4	80
ONL O80/1270	11.5	12.7	80
ONL O80/1400	12.8	14	80
ONL O80/1530	14.1	15.3	80
ONL 100/1010	8.9	10.1	100
ONL 100/1140	10.2	11.4	100
ONL 100/1270	11.5	12.7	100
ONL 100/1400	12.8	14	100
ONL 100/1530	14.1	15.3	100
ONL 100/1660	15.4	16.6	100
ONL 120/1140	10.2	11.4	120
ONL 120/1270	11.5	12.7	120

ONL 120/1400	12.8	14	120
ONL 120/1530	14.1	15.3	120
ONL 120/1660	15.4	16.6	120
ONL 120/1790	16.7	17.9	120
ONL 140/1270	11.5	12.7	140
ONL 140/1400	12.8	14	140
ONL 140/1530	14.1	15.3	140
ONL 140/1660	15.4	16.6	140
ONL 140/1790	16.7	17.9	140
ONL 140/1920	18	19.2	140
ONL 160/1400	12.8	14	160
ONL 160/1530	14.1	15.3	160
ONL 160/1660	15.4	16.6	160
ONL 160/1790	16.7	17.9	160
ONL 160/1920	18	19.2	160
ONL 160/2050	19.3	20.5	160

The symbols of "ONL" are: O-apply to OPGW cable, N-tension set, L-helical rods. The products are beyond the schedule, if need more please contact our company freely.

**OPGW Extra-Strength Double Preformed Tension Clamp**

Type	Available Dia.of Cable		RTS of cable (kN)
	Min. (mm)	Max. (mm)	
ONLS 170/1530	14.1	15.3	170
ONLS 170/1660	15.4	16.6	170
ONLS 170/1790	16.7	17.9	170
ONLS 210/1660	15.4	16.6	210
ONLS 210/1790	16.7	17.9	210
ONLS 210/1920	18	19.2	210
ONLS 250/1790	16.7	17.9	250
ONLS 250/1920	18	19.2	250
ONLS 250/2050	19.3	20.5	250
ONLS 320/1920	18	19.2	320
ONLS 320/2050	19.3	20.5	320
ONLS 400/2050	19.3	20.5	400
ONLS 400/2180	20.6	21.8	400

The symbols of "ONLS" are: O-apply to OPGW cable, N-tension set, L-helical rods, S-double tension set The products are beyond the schedule, if need more please contact our company freely.