



Overview

The body and keeper are made of aluminium alloy, other parts are made of hot-dip galvanized steel.

MRJ

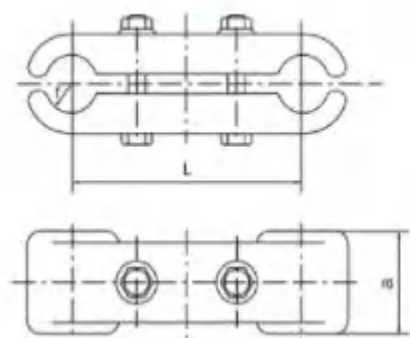

MRJ3

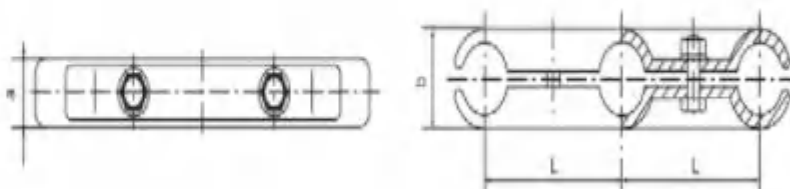

Parameter

MRJ

Catalog No.	Suitable Conductor	Dimensions(mm)			Weight (kg)
		a	L	r	
MRJ-4/120	19.02~21.28	50	120	11	0.4
MRJ-5/120	23.70~27.36	60	120	14	0.6
MRJ-6/120	30.16~33.20	70	120	17	0.7
MRJ-4/200	19.02~21.28	50	200	11	0.9
MRJ-5/200	23.70~27.36	60	200	14	1
MRJ-6/200	30.16~33.20	70	200	17	1.2
MRJ-4/400	19.02~21.28	50	400	11	2.1
MRJ-5/400	23.70~27.36	60	400	14	2.5
MRJ-6/400	30.16~33.20	70	400	17	2.8

MRJ3

Catalog No.	Suitable Conductor	Dimensions(mm)			Weight (kg)
		a	b	L	
MRJ3-240/200	LGJ-240	50	44	200	1.5
MSJ-10/24 (MRJ3-600K/120)	LGKK-600	50	68	120	2.7
MSJ-10/24 (MRJ3-600K/200)				200	2.7
MSJ-10/24 (MRJ3-1400/120)	LGJQT-1400 NAHLGJQ-1440	50	68	120	2.2
MSJ-10/24 (MRJ3-1400/200)				200	2.7
MRJ3-1440N-200		60	70	200	2.7

