


Products Description

Combined copper-plated ground rods are equipped with a coaxial connector, a driving head and a drill bit. According to different geological and usage requirements, the length of the copper-plated grounding rod can be increased arbitrarily by using the coaxial connector. The top of the rod adopts a driving head (or hammer head) for deep drilling, and the end adopts a special drill bit to facilitate deep drilling of the rod.

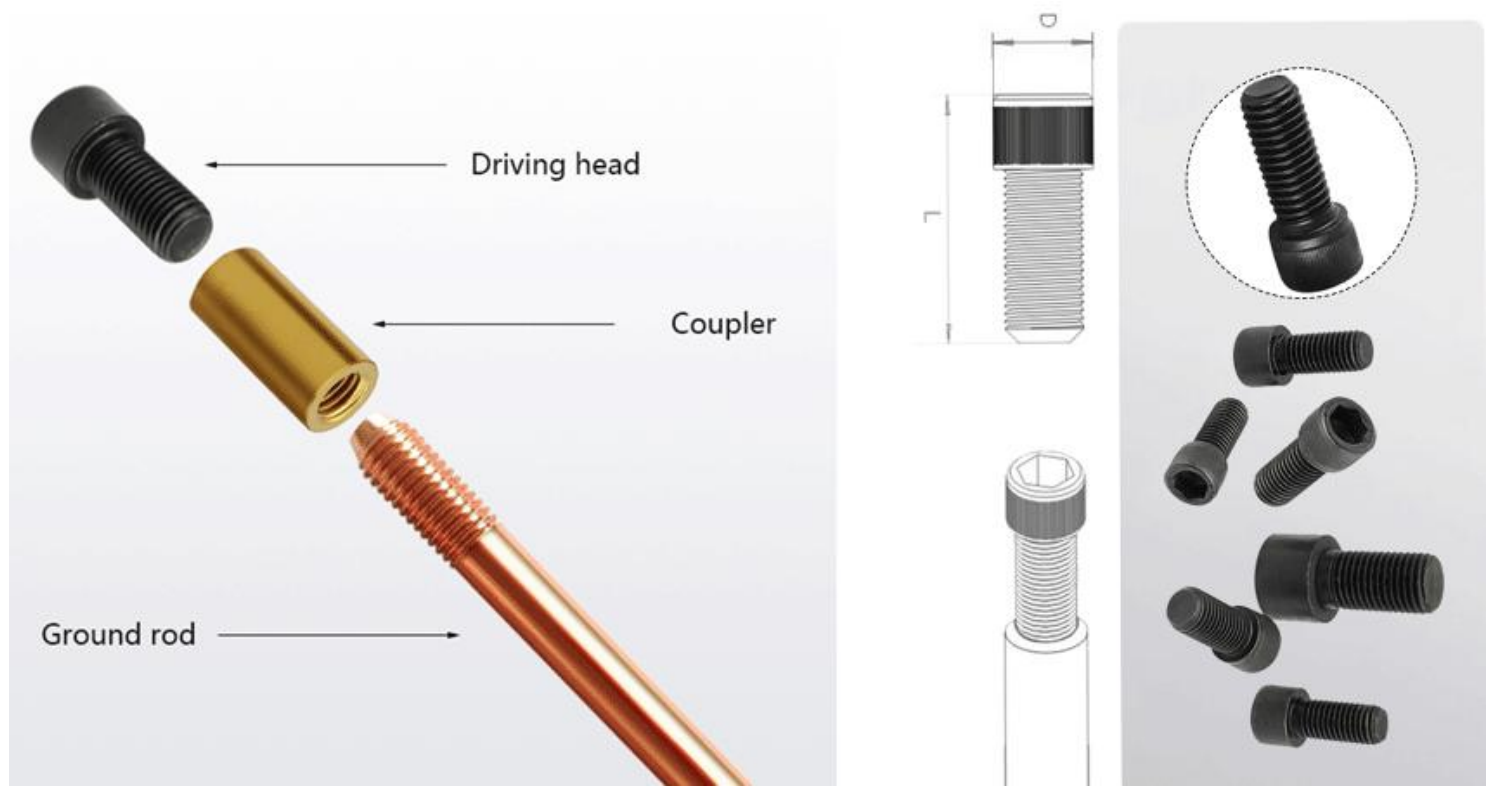

Product specifications	Rod diameter (mm)	Screw type (inch)
UNI-101296	12.7	9 月 16 日
UNI-101458	14.2	5 月 8 日
UNI-101416	14.2	M16
UNI-101618	16	M18
UNI-101734	17.2	3 月 4 日
UNI-101820	18	M20
UNI-102022	20	M22
UNI-102527	25	M27