


### Overview

Self-Supporting ABC Line Suspension clamp designed to suspend four or two insulated main connectors in self-supporting aerialbundled cable system, up to 1KV. Suspension Clamp attach to towers, poles or walls, on angles up to 30°.

Self-Supporting ABC Line Suspension clamp applied on cables from 16 to120 mm<sup>2</sup> in main electrical connections. Tightening installation torque should not be lower than 10 N·m.

ABC Accessories Suspension clamp is made of high strenght alumi-num parts, weather and Uv resistant fiberglass reinforcedplastic parts, corrosion resistant hardware, and stainlesssteel ring. ABC Cable Suspension clamp is a one-piece format. Assists linesmen by hanging the LV-ABC in open position, and allow quick installation by tightening the fastener. Stainless steelring allows easy installations with the LV ABC hooks, pigtails.

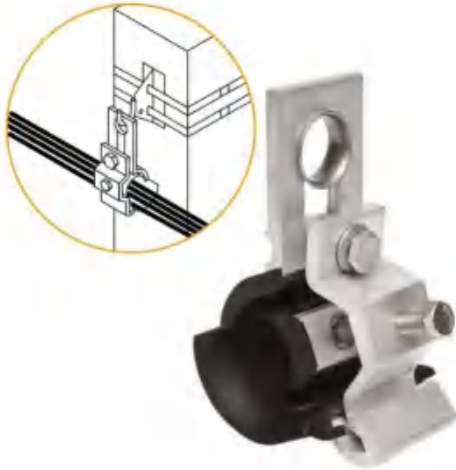

Modle	Conductor Range
UNI130	2-4x(25-50)≤60° / 2-4 x (25-120) ≤30°
UNI140	2-4x(25-120)≤30°
UNI136	2-4x(25-120)≤90°